



1/12

FIG. 1
(PRIOR ART)



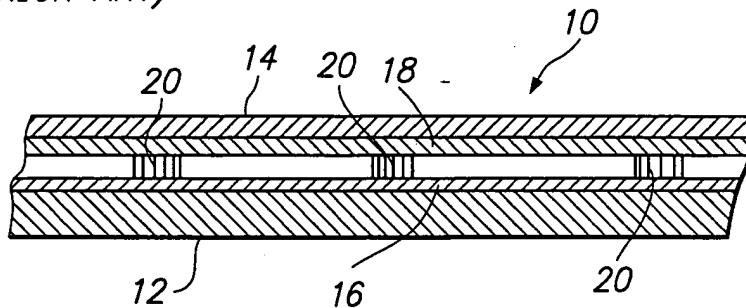


FIG. 2
(PRIOR ART)



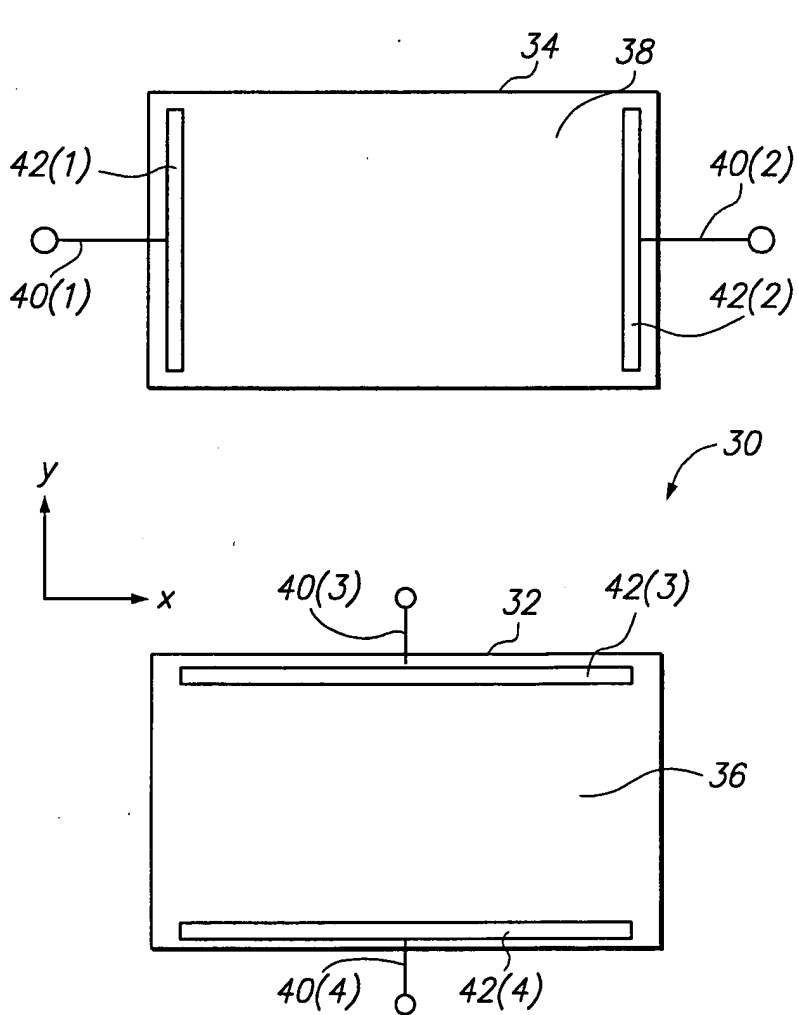

2/12

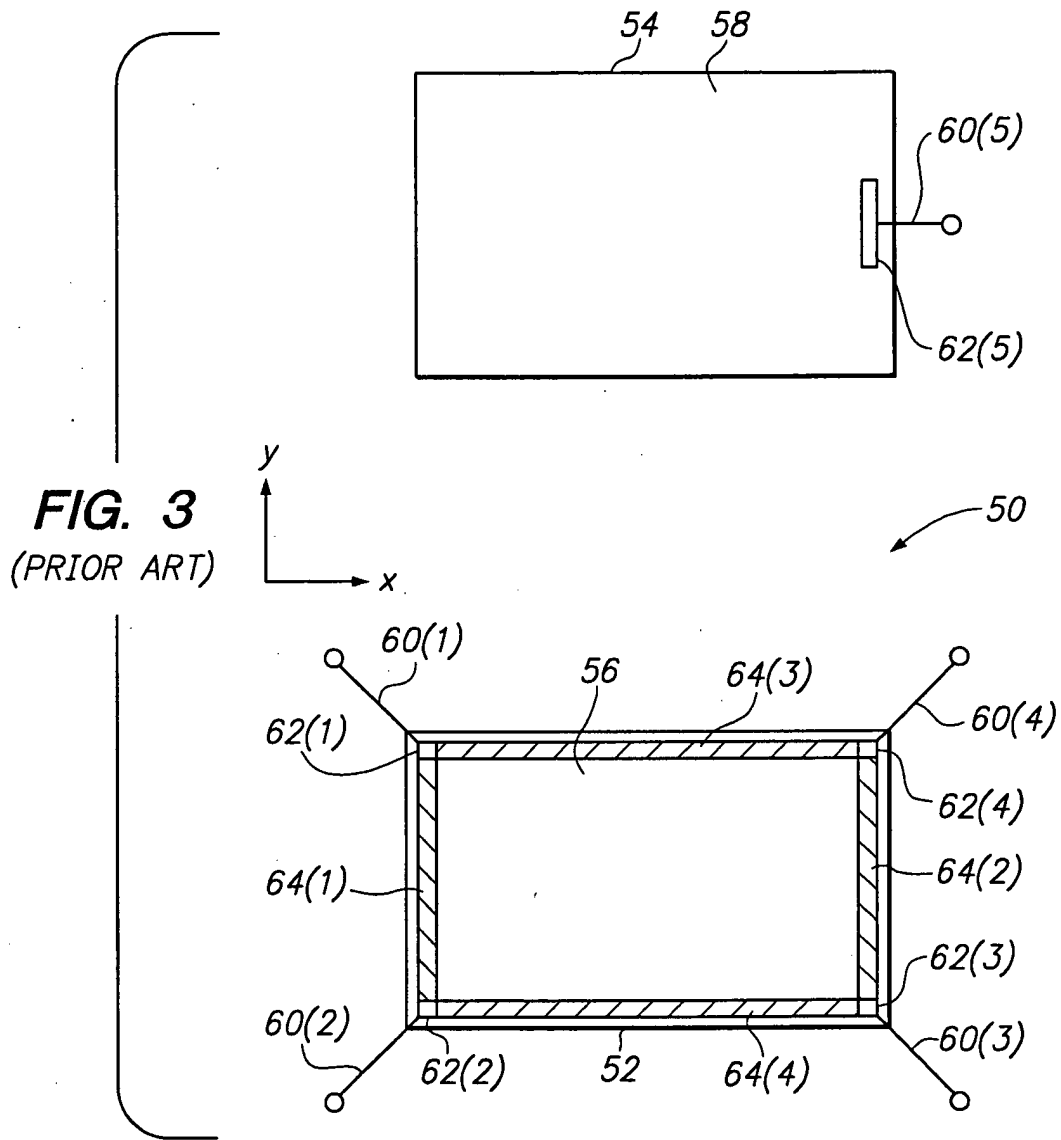




TOUCH SENSOR WITH CONDUCTIVE POLYMER SWITCHES


Joel C. Kent, et al
10/720,421

3/12

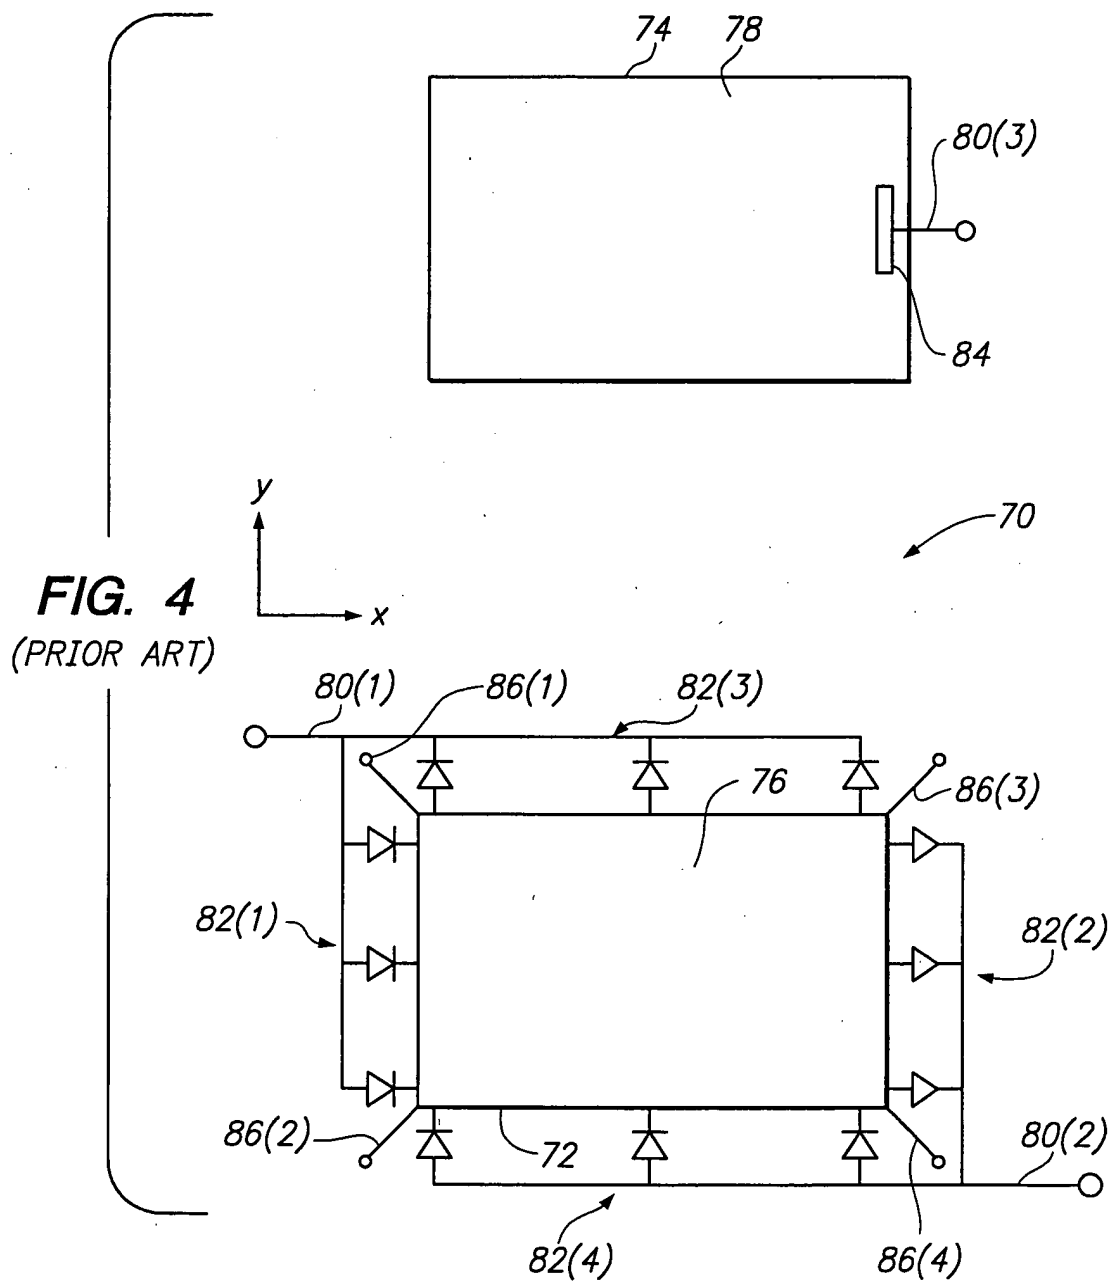



4/12

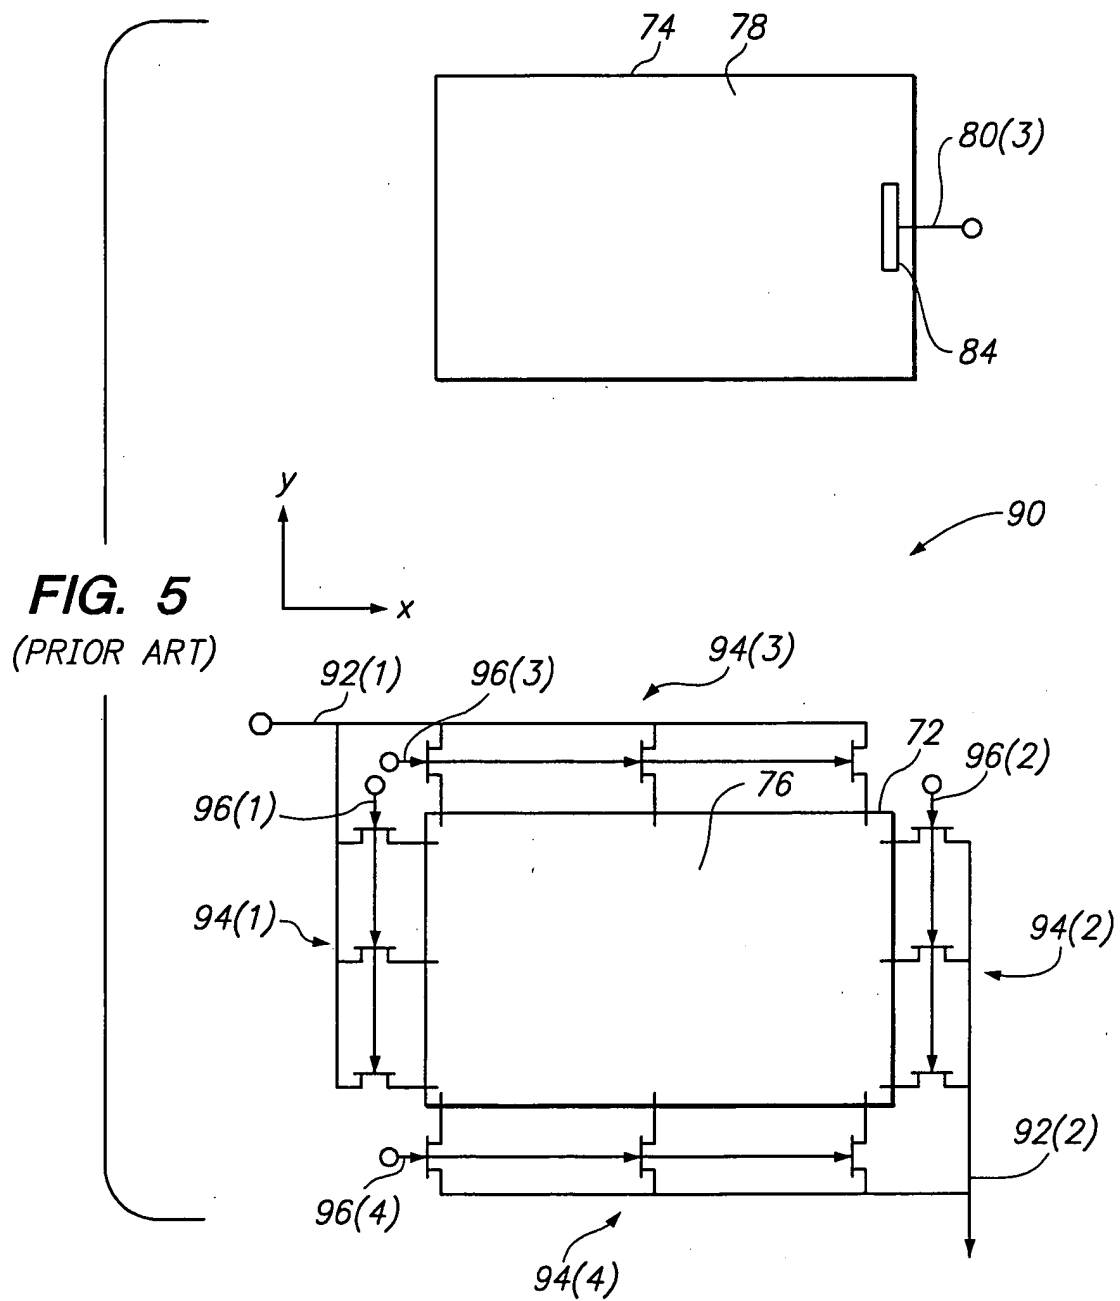



5/12

FIG. 6





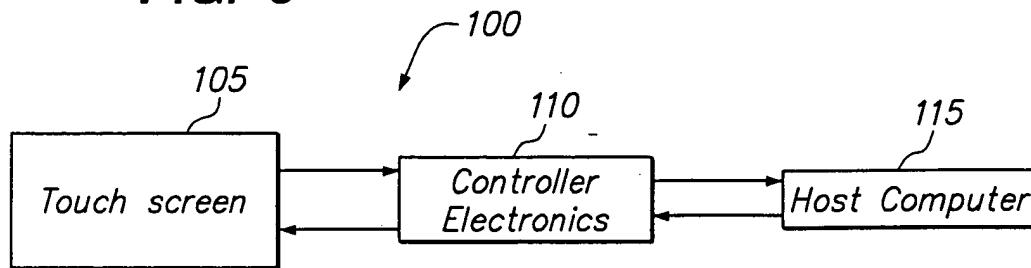


FIG. 7

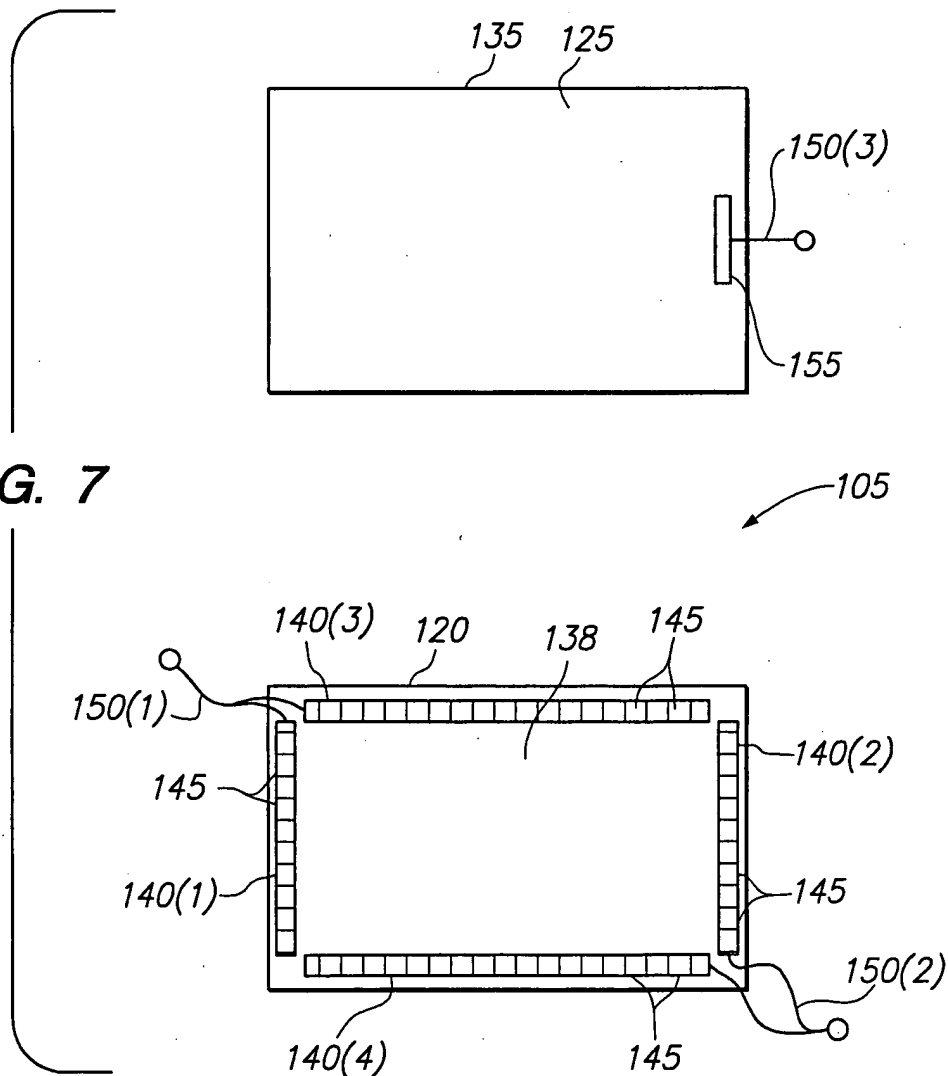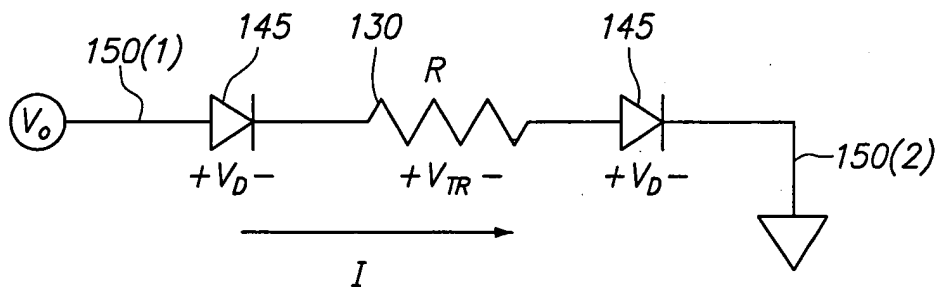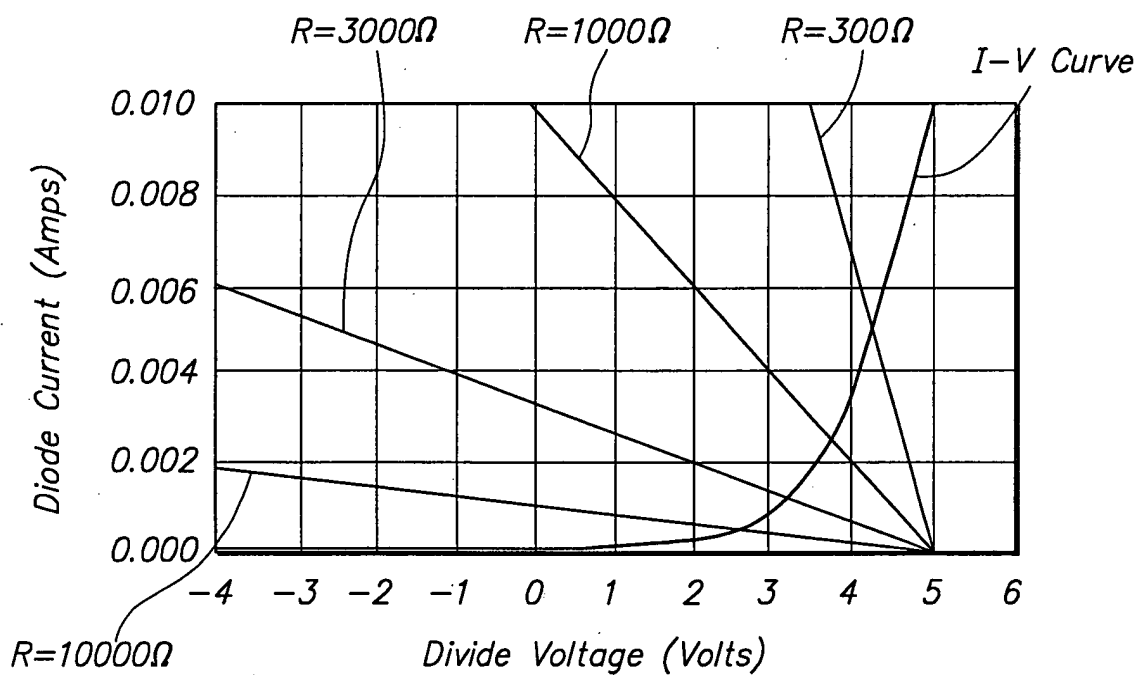

6/12

FIG. 8**FIG. 9****FIG. 10**

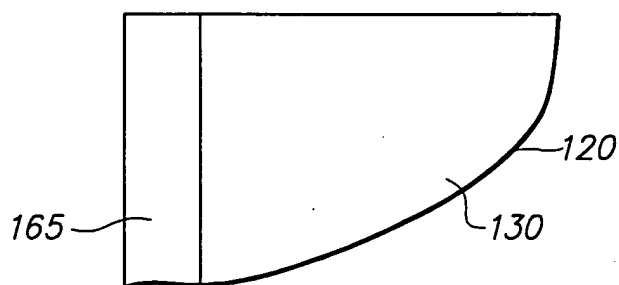

7/12

FIG. 11

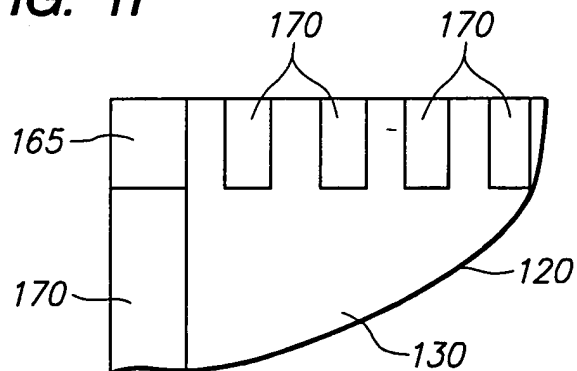


FIG. 12


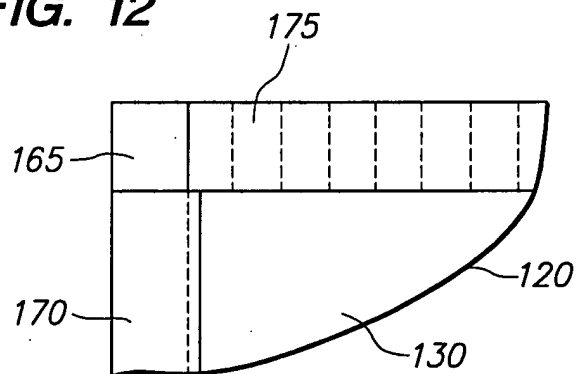


FIG. 13



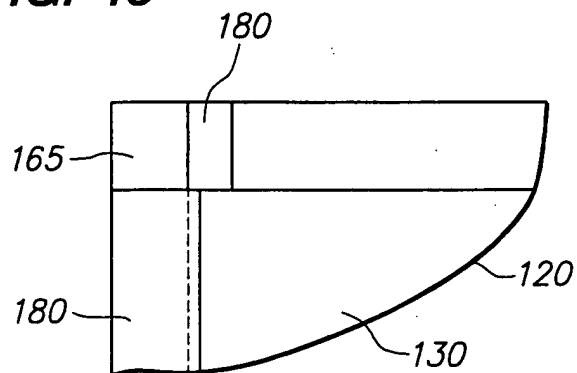

8/12

FIG. 14

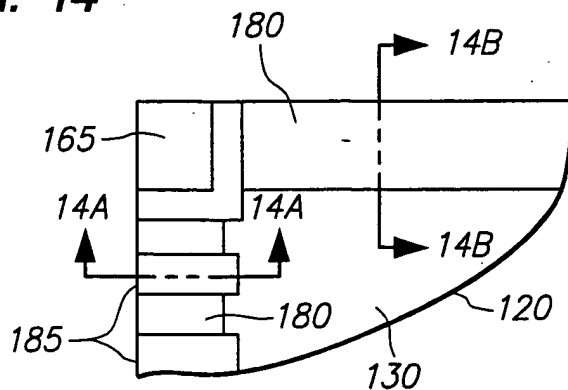


FIG. 14A


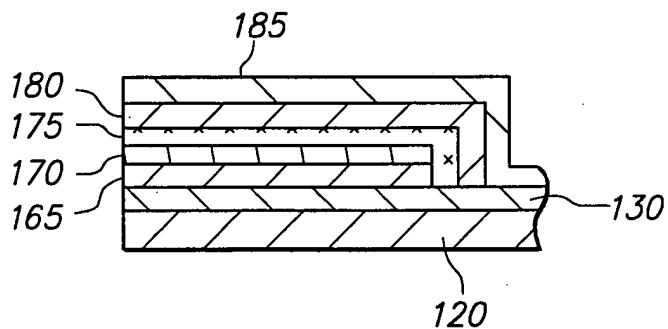


FIG. 14B



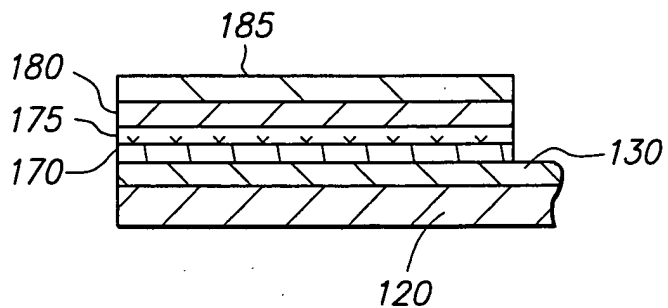

9/12

FIG. 15

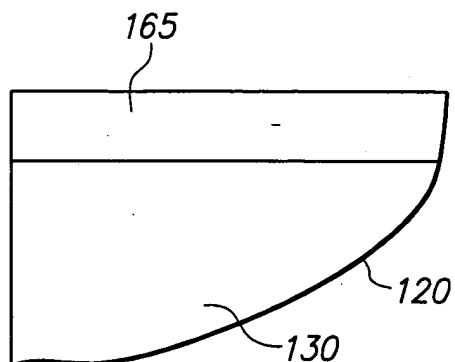


FIG. 16


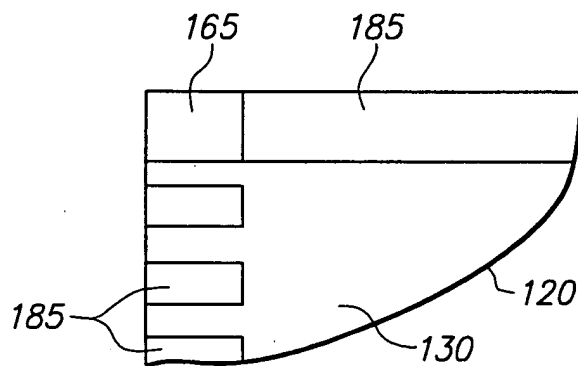


FIG. 17



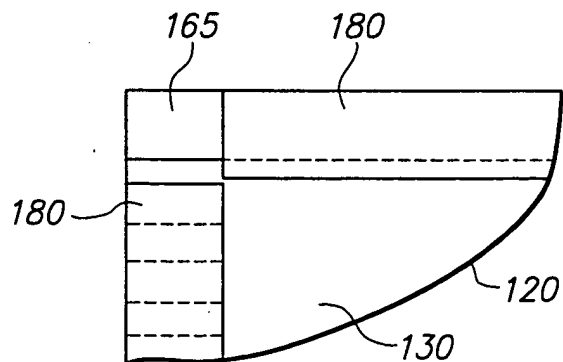

10/12

FIG. 18

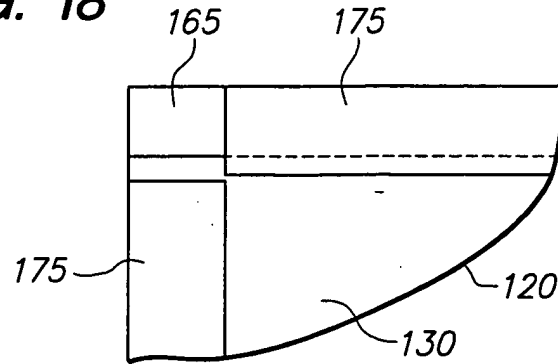


FIG. 19

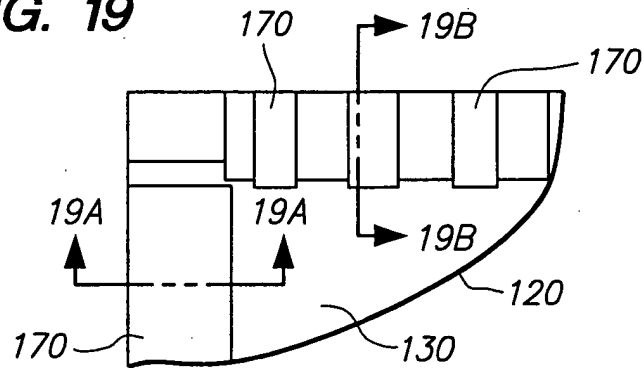


FIG. 19A


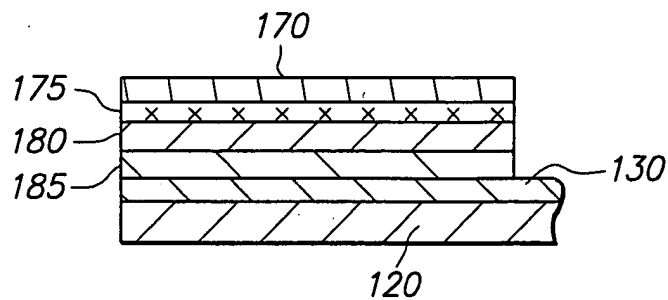


FIG. 19B



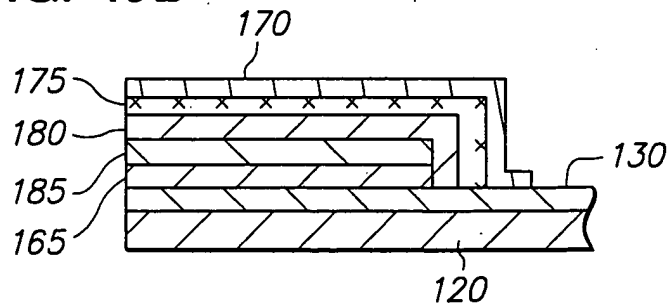

11/12

FIG. 20


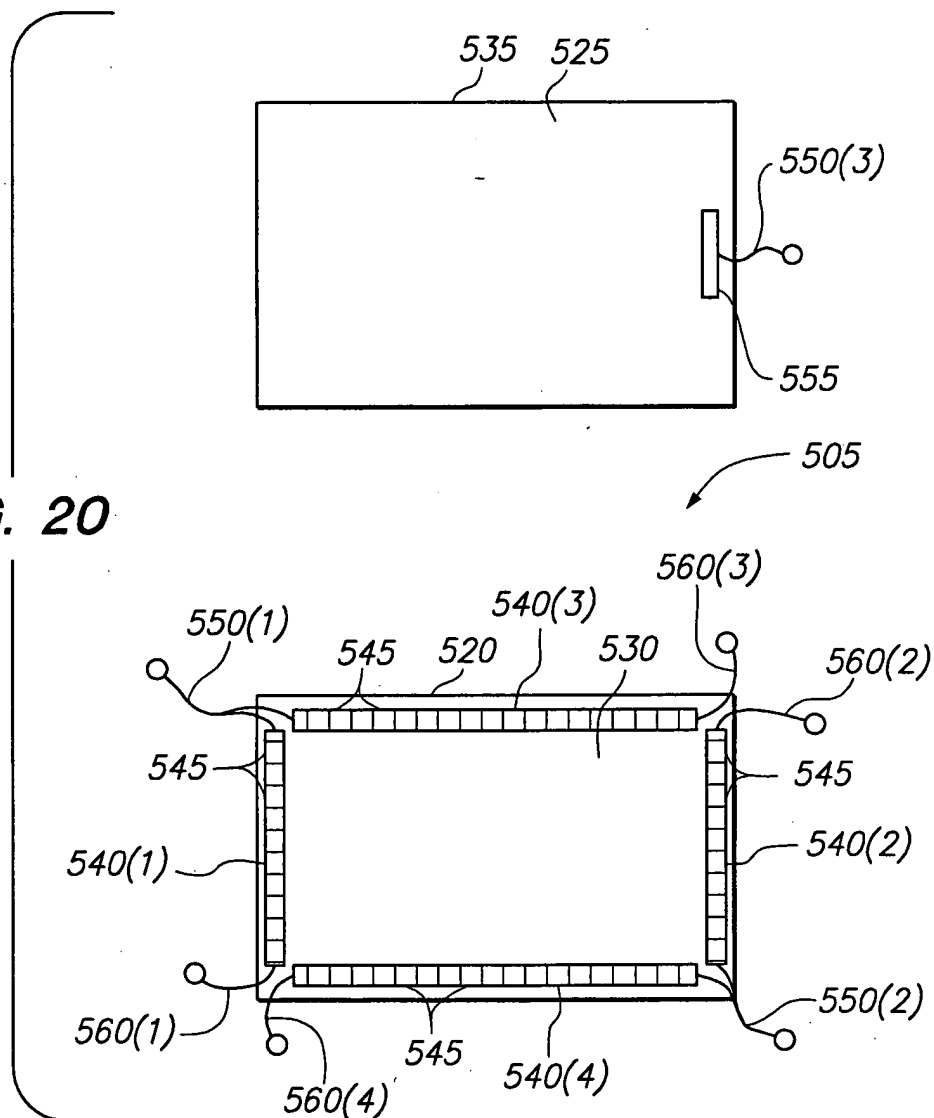


FIG. 21



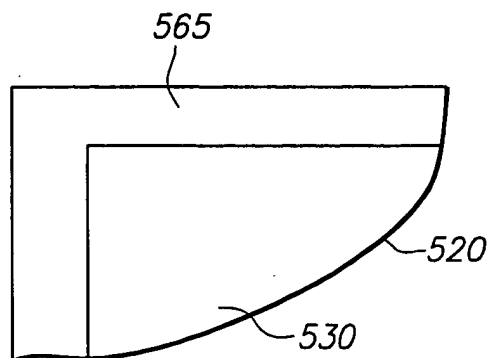

12/12

FIG. 22

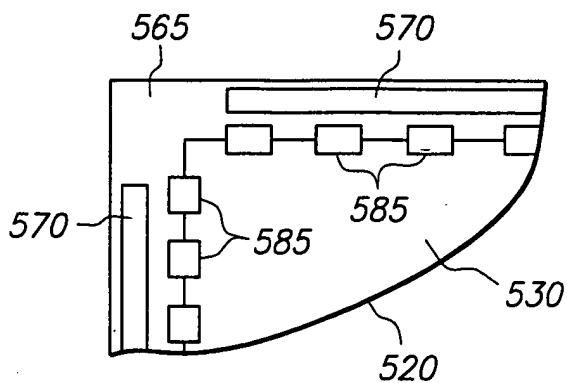


FIG. 23

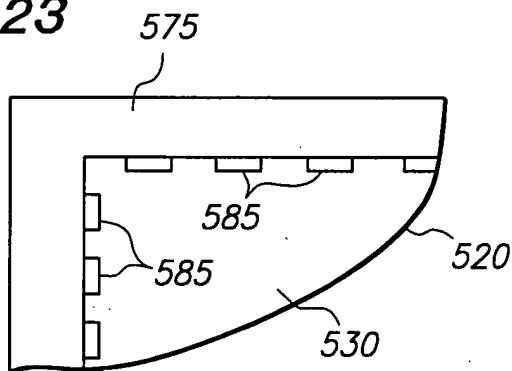


FIG. 24

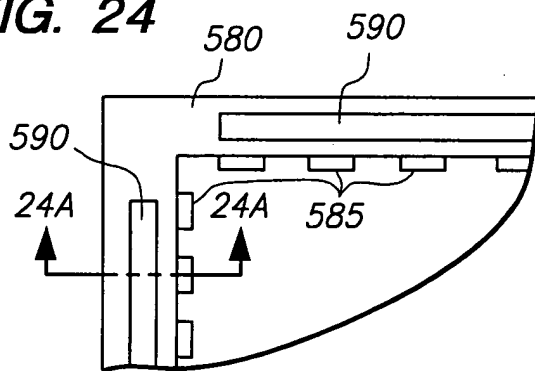


FIG. 24A

